




KERRADECO WALL

Each interior has different possibilities. Each one can create an individual, inspiring atmosphere.

The modern Kerradeco decorative panels, created by VOX stylists and experts, makes walls cease to be a background and become a space protagonist.

A large palette of designs is a dream arrangement potential and new, realistic textures satisfy the sense of touch.

Kerradeco is not only a great aesthetic solution. It also has excellent technical parameters. It's a moisture and impacts resistant wall, non-flammable and increasing the sound insulation of rooms.

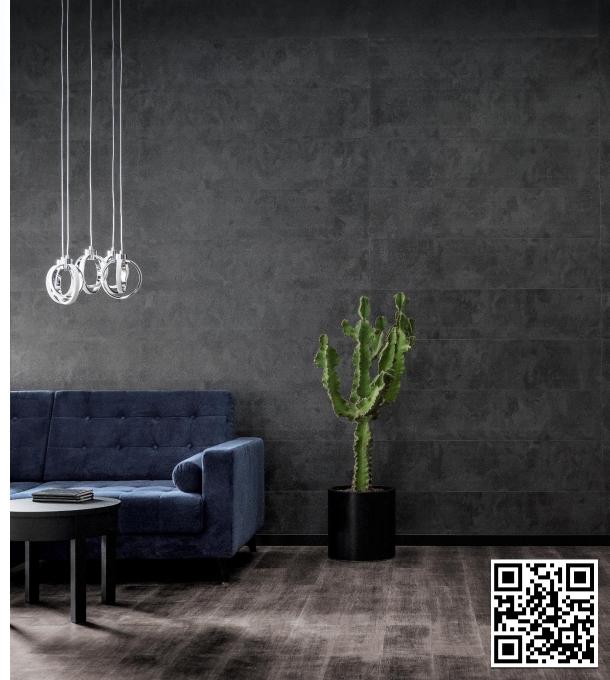

STONE COLLECTION















4' 5 ¹/₈" x 11 ⁵/₈" 8' 10 ⁵/₁₆" x 11 ⁵/₈"

STONE MISTY

4' 5 ¹/₈" x 11 ⁵/₈" 8' 10 ⁵/₁₆" x 11 ⁵/₈"

DESERT STONE

 $4' 5 \frac{1}{8}$ " x $11 \frac{5}{8}$ "





STONE MOON

4' 5 $^{1}/_{8}$ " x 11 $^{5}/_{8}$ "



LOFT CONCRETE 4' 5 1/8" x 11 5/8"





GREY STONE
4' 5 1/8" x 11 5/8"





LOFT RUSTY

 $4' 5 \frac{1}{8}$ " x $11 \frac{5}{8}$ "



STONE ANTHRACITE

 $4' 5 \frac{1}{8}$ " x $11 \frac{5}{8}$ " 8' $10 \frac{5}{16}$ " x $11 \frac{5}{8}$ "



WOOD COLLECTION





Snowy Wood







AVAILABLE TEXTURES:



Wood



4 x 270 cm 4x 8' 10 ⁵/₁₆" 3,186 m² 34.293 ft² vertical installation

ncrete



WOOD BRANDY

 $4' 5 \frac{1}{8}$ " x $11 \frac{5}{8}$ "





SNOWY WOOD

4' 5 $^{1}/_{8}$ " x 11 $^{5}/_{8}$ "



WOOD VINTAGE

4' 5 $^{1}/_{8}$ " x 11 $^{5}/_{8}$ "





WOOD CARBON 4' 5 1/8" x 11 5/8 "



CONCRETE

4' 5 ¹/₈" x 11 ⁵/₈ " 8' 10 ⁵/₁₆" x 11 ⁵/₈ "



TEXTILE



SCOTCH 4' 5 ¹/₈" x 11 ⁵/₈" 8' 10 ⁵/₁₆" x 11 ⁵/₈"

AVAILABLE TEXTURES:




8 x 135 cm 8 x 4' 5 1/8" 3,186 m² 34.293 ft² horizontal installation



MULTIPLE USE

- Kerradeco is also a great solution for public and commercial spaces. The variety of patterns and textures is a real showcase for architects and interior designers.
- Excellent choice in new construction and renovation.
- Universal application, due to it's properties it may replace:
- ceramic tiles do not crack under impact, do not require jointing, reduced time of installation, clean installation,
- MDF boards resistant to mechanical damage, resistant to moisture and water,
- drywall (also to build partition walls) three operations (mounting of plasterboard, filling, painting) are replaced with one – Kerradeco panels installation.

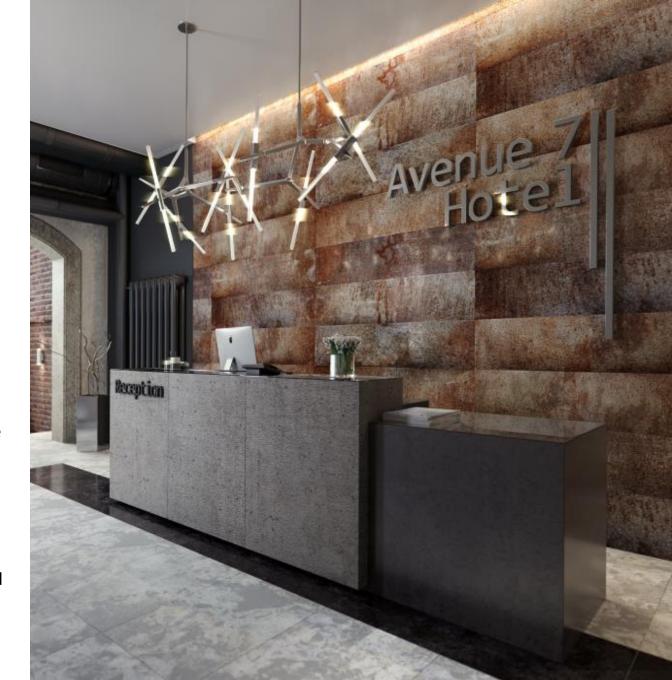











DISTINCTIVE FEATURE

- Innovative Kerracore technology
- Technical and functional parameters which doesn't feature competitive products:
 - 10 years warranty
 - fire class B (EU standard) / Class 1 (UK standard)
 - safe in contact with food
 - increases sound insulation of the room (Rw= 60 dB*)
 - durable and waterproof.
- Fast and intuitive installation.



^{*} tested wall was made of silicate blocks, covered with mineral wool and Kerradeco. The test was made to answer the question of how much Kerradeco will improve sound insulation of a typical hotel wall of R'A1 = 55 dB, compared with the commonly used drywall. Studies have shown that the effectiveness of Kerradeco is comparable to 12.5 mm drywall with mineral wool filling.

TECHNOLOGY

 Exceptional aesthetic and functional values of Kerradeco are due to the Kerracore technology used during production.

BOTTOM LAYER (FOAMED POLYMER)

The composite is made of a specially selected mix of minerals and polymers. It is characterized by high density and homogeneity, which affects the high strength of the product and its resistance resistance to mechanical damage.

TOP LAYER (HARD POLYMER)

Made of polymers hardened, impact and scratch resistant with a thermally imprinted structure that gives a realistic and natural look.

OVERPRINT

High-quality overprint made with innovative digital printing technology perfectly reproduces natural materials such as stone, wood or textiles.

PROTECTIVE VARNISH

The panel is covered matt varnish, which protects the surface against mechanical damage, UV radiation and allows to easily remove any dirt from the surface.



KERRADECO MAIN FEATURE



FAST INSTALLATION



RESISTANT TO MECHANICAL DAMAGE



WATERPROOF



CLEANLINESS



10 YEARS WARRANTY

SAFETY & FUNCTIONALITY




100 % RECYCLABLE



SAFE IN CONTACT WITH FOOD



FIRE CLASS B-s3, d0



UV RESISTANT



INCREASES SOUND INSULATION OF THE ROOM (Rw=60 dB)



DOES NOT EMIT TOXIC FUMES INTO THE ATMOSPHERE



Sn and Pb Free



ACCESSORIES

TRIMS


A-01

Starter trim



A-03

External angle



A-02

Internal angle





Top edge trim





MOUNTING ADHESIVE

Transparent



Trims availabe in 2 colours:






Champagne




TIME SAVING

- Quick installation— easy cutting, tongue and groove joint system.
- No need for additional surface-preparation works.
- Clean installation using commonly available assembly tools.
- System of well-matched finishing trims.
- An option for quick construction of partition walls.
- Rooms finished with Kerradeco may be immediately used (e.g. no need for painting).

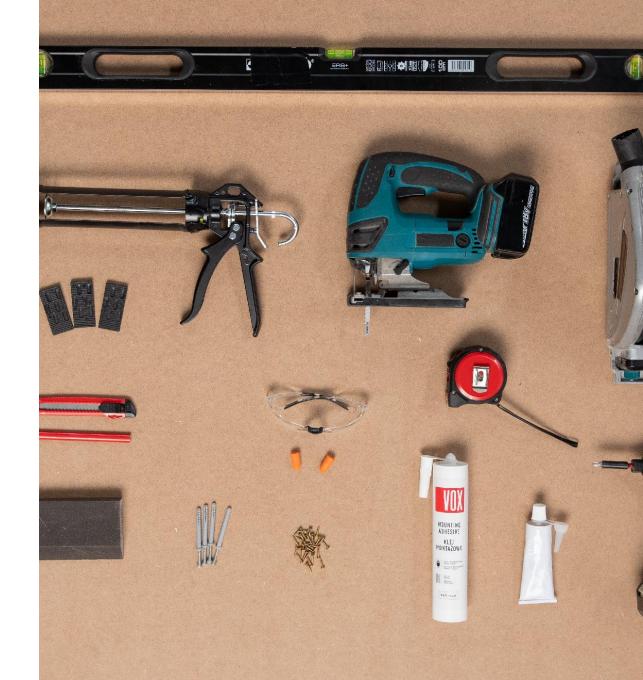

INSTALLATION USING ADH


- Only on stable smooth base (eg. concrete, tiles, drywall).
- It is recommended to use VOX mounting adhesive (index 6004018) or any other universal adhesive based on hybrid polymer characterized by high initial bonding strength.
- Panels should be installed in the order specified by numbers on the back of the panel.
- Detailed instruction: <u>INSTALLATION</u>
 <u>INSTRUCTION</u>
- INSTALLATION MOVIE

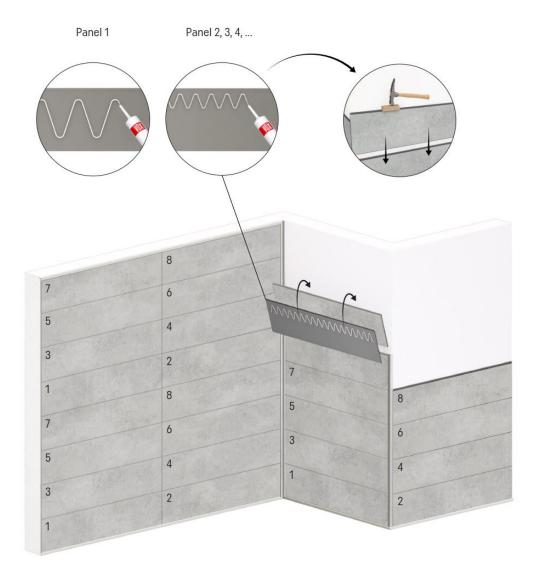



INSTALLATION ON WOOL BATTENS

- Reduces uneveness of wall.
- Detailed instruction: <u>INSTALLATION INSTRUCTION</u>
- <u>INSTALLATION MOVIE</u>

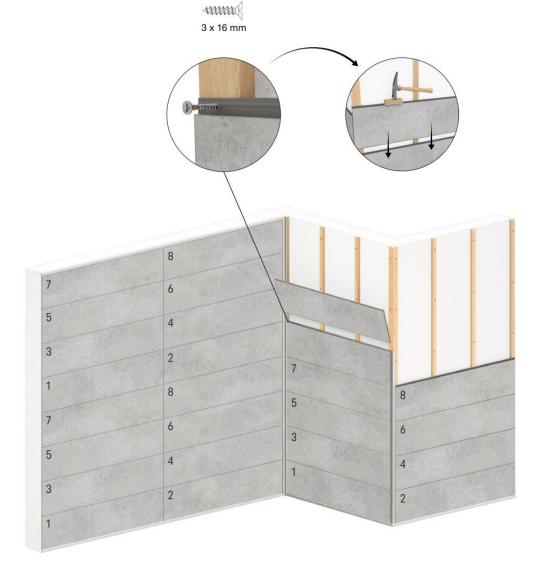



ADDITIONAL INFORMATION

TRANSPORT & STORAGE:

- In a horizontal position, on a flat Surface.
- In non-sunlight places.
- Storage or transporting temperature less than 60°C.

PRACTICAL INFORMATION

- All indexes have 1 package as MOQ (unless 2 packages are required by particular decor).
- Index A products available on stock 72h.
- Index B products that are made to order lead time of maximum 3 weeks.

TEMPERATURE RESISTANCE

 Do not use in areas exposed to high temperatures above 60°C.

CLEANING:

- Do not leave liquid dirt to dry.
- Do not clean with sharp and abrasive cloths, sponges and brushes.
- Do not use acetone and acid based fluids and to clean and disinfect.
- Do not leave any cleaning agents on the panels' surface.
 After cleaning rinse thoroughly. Any cleaning agents' residue on the surface of panels may result in discolouration.



MARKETING MATERIALS

- Catalogue index 9002595
- Totem*





oorsAndBeyond

Superior Quality Delivered With Dedication

384 Ryders Ln

2930 SW 30th Ave, Unit A/B

Milltown, NJ 08850

Pembrke Park, FL 33009

(609) 212-0246

(754) 297-5885

sales@doorsandbeyond.com

